
## Two-axle, two-tank, Polish made railway wagon, discharge system: bottom discharge at the end of the wagon, with air supply to each tank

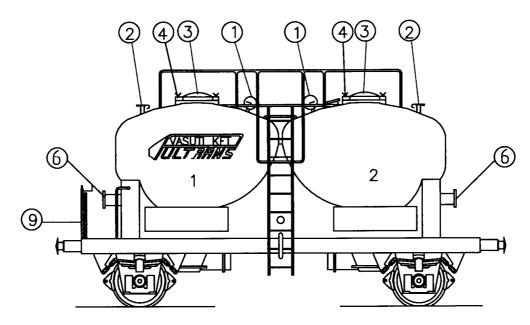

13.0 tons


27,0 tons

26,4 m<sup>3</sup>

3,0 bar

## Technical data

Maximum length: 8 740,0 mm Maximum width: 3 000,0 mm Maximum height: 4 016,0 mm Weight (ca): Load capacity (ca): Cubic capacity: 2 X 13,2 m<sup>3</sup> Total capacity: Maximum working pressure:

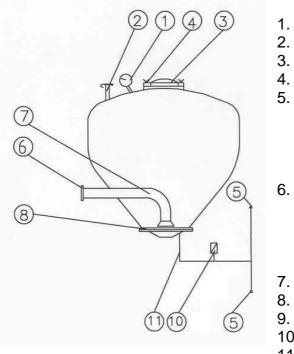

## Loading limits

	А	В	С
S	19	23	27
120	00		

Capable of RIV traffic without restrictions

## Signs

- Manometer (pressure measuring device)
- Air release valve
- Top cover cap
- 4. Top cover screw
  - Diameter 52 mm (type C) air charging coupling with caps on both ends (DIN 14332,14307, ÖNORM F2131, MSZ 1057)

Cap of air charging pipe (DIN 14332,14307, ÖNORM F2131, MSZ 1057)

Diameter 110 mm(type A) material discharging pipe's coupling with cap (DIN 14303, ÖNORM F2120, F2129, MSZ 1057)

Cap of material discharging pipe (DIN 4303, ÖNORM F2120, F2129, MSZ 1057)

- **Discharging pipe**
- Fluidising device containing textile filter
- Handbrake

10. Safety valve

Pipe of discharging air 11.