


Four-axle, Romanian made, pressure discharge railway wagon for carrying bulk powder materials

Discharge system: discharge at the top of the wagon and equipped with inner aerator ring

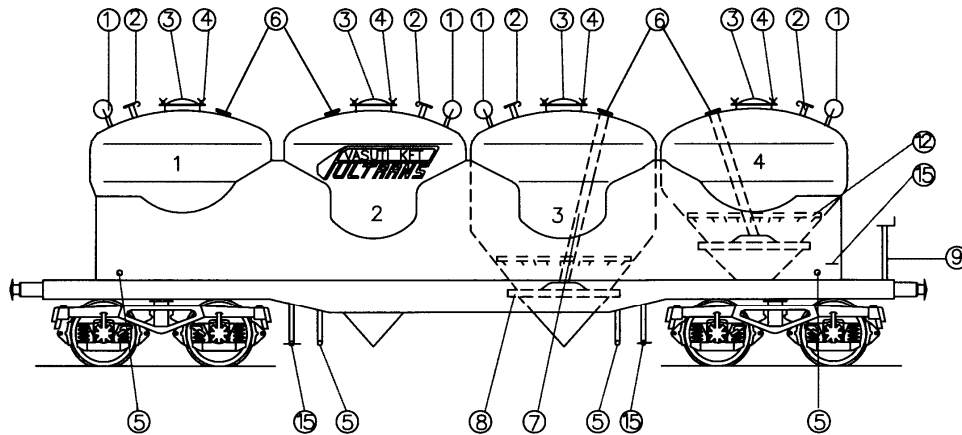

Technical data

Maximum length:	14 040,0 mm
Maximum width:	2 980,0 mm
Maximum height:	4 247,0 mm
Weight (ca):	26,0 tons
Load capacity (ca):	54,0 tons
Cubic capacity:	2 x 9,2 + 2 x 14,3 m ³
Total capacity:	47,0 m ³
Maximum working pressure:	3,0 bar

Loading limits

	A	B1	B2	C
S	38	44	46	54
120	00			

Capable of RIV traffic without restrictions.

Signs

-
1. Manometer (pressure measuring device)
 2. Air release valve
 3. Top cover cap
 4. Top cover screw
 5. Diameter 52 mm (type C) air charging coupling with caps on both ends (DIN 14332,14307, ÖNORM F2131,MSZ 1057)
Cap of air charging pipe (DIN 14332,14307, ÖNORM F2131,MSZ 1057)
 6. Diameter 110 mm(type A) material discharging pipe's coupling with cap (DIN 14303,ÖNORM F2120, F2129,MSZ 1057)
Cap of material discharging pipe (DIN 4303, ÖNORM F2120, F2129,MSZ 1057)
 7. Discharging pipe
 8. Fluidising device containing textile filter
 9. Handbrake
 10. Safety disc
 11. Pipe of discharging air
 12. Inner aerator ring
 13. Back-blow valve
 14. Ball valve of air charging
 15. Air charging valve move bars
 16. Butterfly valve
 17. Coupling of flexible discharge pipe
 18. Flexible discharge pipe